



time2

**Outdoor Camera PC  
Quick Setup Guide**

# Outdoor Camera

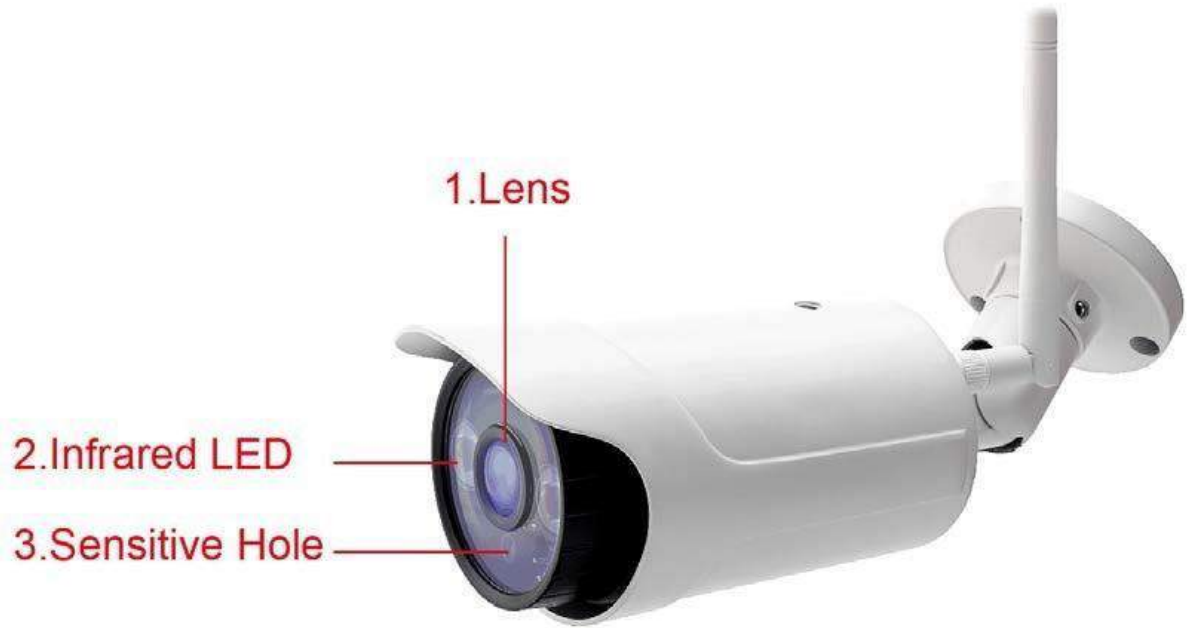

## Connecting the Camera

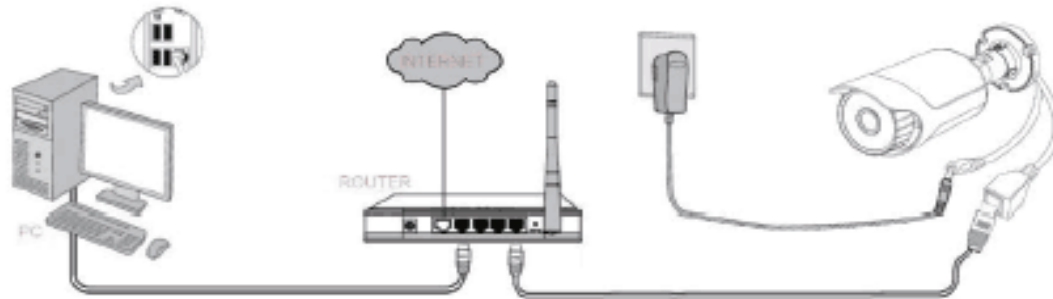

1. Screw the WiFi Antenna into the gold screw at the back of the camera.
2. Plug the power adapter into the power port lead attached to the camera.
3. Plug one end of the Network>Ethernet cable into Ethernet port lead attached to the camera and the other end into your WiFi Internet Router. It will take approximately 30 seconds for the camera to power up.
4. Once the power cable and Ethernet cable have been connected, you will hear a faint click to indicate the camera has been connected.

## PC Setup

1. Download the **IP Camera For PC** from the link below:

<https://www.time2technology.com/product-downloads/Time2-HSIP2-Wireless-Surveillance-Camera.html>

2. After opening the APP click on the **Add Device (+)** tab



3. Click **Search** at the bottom.



4. Click on your camera.
5. Once you have selected your camera, the camera information will be filled. Please leave the **Password field empty**.
6. Click **OK** to save your settings.
7. For extra security you will be asked to to change the **username** and **password**. Click on the camera and it will take you to the user settings.
8. Change the details for the **Administrator only** and click **Done** to save your changes.

User name:

---

Password:

---

Show password

9. Once the camera appears online click and drag the camera to the viewing screens (black squares) to view the Live Feed.

## Wi-Fi Setup

Using this setting you can set the camera to function over your wireless network.

**Please note: When setting the camera up for the first time, it will need to be wired into the internet router first.**

The screenshot shows a 'WIFI' configuration window. At the top is a table with three columns: ID, SSID, and MAC. Below the table is a 'search' button. Underneath the table are several configuration options: 'use WLAN' with a checked checkbox, 'SSID' with a text box containing 'BTHub5-XNPF', 'NetWork Type' with a dropdown menu set to 'Infra', 'WiFi encryption' with a dropdown menu set to 'WPA2-PSK Personal', and an empty 'Encryption' text box.

ID	SSID	MAC
1	BTWfi-fi	12:1E:78:1E:F6:A8
2	BTWfi-X	32:1E:78:1E:F6:A8
3	BTHub5-XNPF	00:1E:78:1E:F6:A8
4	HP-Print-14-Deskjet 3520 series	C4:34:6B:EF:EC:14
5	ELMCAP	00:1D:AA:2F:66:08
6	ELM GUEST	00:1D:AA:2F:66:09

search

use WLAN

SSID

NetWork Type

WiFi encryption

Encryption

Ensure there is a tick in the **“use WLAN”**.

Click **“Search”** to search for existing wireless networks then select the network you would like to connect to. All the information will be automatically filled in except the password for your router.

In the **“Encryption”** box enter your router password and click **“Set”**.














Remove the Ethernet cable, and the camera will automatically configure itself with the router.

Close down the window and you will see the camera come online using the wireless function.

# Camera Controls

Simply swipe in any direction to move the indoor rotating camera. Other actions available are below:

**Please note the outdoor camera is a static camera and cannot pan/tilt.**

-  Left and Right Reversal
-  Up and Down Reversal
-  Left and Right Cruise
-  Up and Down Cruise
-  Mute
-  Snapshot
-  Recording
-  Resolution Switch
-  Preset Point Setting
-  Brightness Setting
-  Contrast Setting
-  Parameter Reset
-  Infrared

## **Support**

For further support with setup and if you require any help to make the most of your camera please contact our customer services support team.

<https://www.time2technology.com/en/support/>

## **Connect With Us:**



<http://m.me/time2HQ>



[www.facebook.com/time2HQ](http://www.facebook.com/time2HQ)



[www.twitter.com/time2HQ](http://www.twitter.com/time2HQ)