

# time2



## Quick Setup Guide

---

HSIP2 Rotating WiFi IP Camera

# Features

---



# Record

---

To record you will need to add a Micro SD card.  
The security camera accepts Micro SD cards up to 64GB.

# Preparing Your Camera

---



HSIP2 IP Camera



Power adapter



Screws



Wall Bracket



Ethernet cable

1. Screw the WiFi Antenna into the back of the camera.



2. Connect your IP camera to the mains using the power adapter provided.



3. Insert the Ethernet cable into the camera and connect the other end into the WiFi router.



# Download the App

---

Search and download the **T2 surveillance pro** Application from the Google Play Store (Android) or Apple App Store (iOS)

The app icon is a white rounded square with a subtle drop shadow. In the center, the word "TIME" is written in a grey, sans-serif font, and the number "2" is written in a red, sans-serif font.

TIME2




# Camera Setup

Step 1: Open T2 Surveillance Pro and click **Add Device** and then click **LAN Search**.




Step 2 : Select your camera and ensure the username is **admin**, leave the password box empty and click **done** in the top right hand corner.



Your camera will appear **online with an empty password**.



Step 3: Click on your camera and a prompt will appear to input a password for your camera. Click **OK** and enter a password for the **Administrator only** and click **Done**. Allow the camera to implement the password and the camera will appear online.




# WiFi Setup

Step 1: Click on the **Settings Cog** and then **WiFi Settings**.



Step 2: Click on **WiFi Manager** and then click on the WiFi network you wish to connect to.

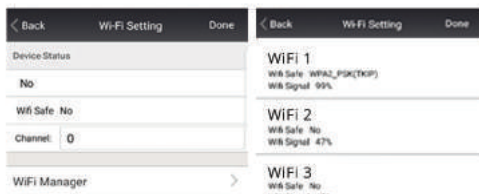

Step 3: Enter your **WiFi Router Password** (found at the back of your WiFi router) and then click **Done**.

Remove the Ethernet cable from the camera.


The camera will now implement the WiFi settings. Once completed you will hear the camera state **Connection Successful**. The WiFi setup is complete and it will reappear online in the app.



# Camera Reset

---

Step 1: Remove the camera on the software by **clicking the minus button**. If you are accessing the camera from the Mobile Phone application click on the **"Device Management"** icon on the top right hand corner. Your camera will appear with the trash can icon next to it. Simply click on this to remove it from the app.



Step 2: Ensure the power cable is inserted.

Step 3: Press and hold the reset button that can be located at the back of the camera for 15 - 20 seconds. Once the reset has been completed you will be required to carry out the initial setup for the camera.

# Additional Support

---

For a complete user guide please visit:

**[www.time2technology.com/support](http://www.time2technology.com/support)**

For further support with setup and if you require any help to make the most of your camera please contact our customer services team.

You can also connect with us through social media:



**<http://m:me/time2HQ>**



**[www.facebook.com/time2HQ](http://www.facebook.com/time2HQ)**



**[www.twitter.com/time2HQ](http://www.twitter.com/time2HQ)**

# Warranty

---

Register your warranty Online within 30 days of purchase for 14 months warranty.

**[www.time2technology.com/warranty](http://www.time2technology.com/warranty)**

time2



UK: Waste electrical products should not be disposed of with household waste. Separate disposal facilities exist for your nearest facilities. See [www.recycle-more.co.uk](http://www.recycle-more.co.uk) for details.